


Acc. de Fundición de Bridas: Carrete Liso

Loosing Flanged Fittings Double Flanged Pipe Serie 02-02

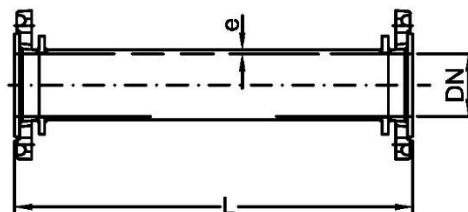

■ Materiales Materials

No.	Parte	Material	Norma
1	Cuerpo Body	Fundición Dúctil GJS-500-7 Ductile Iron GJS-500-7	UNE-EN 1563

■ Dimensiones Dimensions (mm)

L	DN	e	L	DN	e	L	DN	e
80	40	7	100	80	7	125	7.5	
100			150			250	9	
150			200			300	9.6	
200			250	100	7.5	350	10.2	
250			300			400	10.8	
300			400			450	11.4	
400			500	150	7.8	500	12	
500	60	7	600			600	13.2	
			800					
			1000	200	7.4			

*Otros Diámetros consultar

■ Diseño Features

- Presión de trabajo PN 10-16-25 / PN 10-16-25 operating pressure
- Apta para aguas de consumo humano / Suitable for water human consumption
- Pintura epoxy de 250 micras de espesor / Coating paint epoxy 250 microns
- DN 80-300
- Bridas conforme UNE-EN 1092 / Flange according to UNE-EN 1092

■ Ensayos Tests

- Conforme UNE-EN 545 / According to UNE-EN 545



ED.2 Rev.1