


Válvula de Compuerta F4 IDH

F4 Gate Valve IDH Serie 10-01

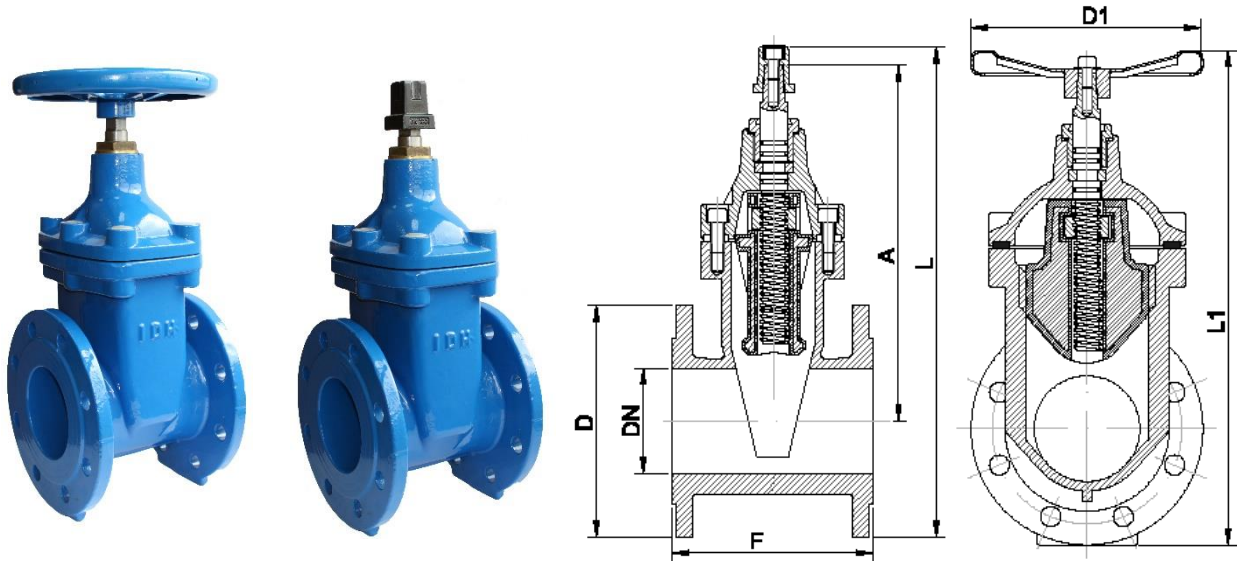

■ Materiales Materials

No.	Parte	Material	Norma
1	Cuerpo y Bonete <i>Body, and Bonnet</i>	Fundición Ductil GJS-500-7 <i>Ductile Iron GJS 500-7</i>	UNE-EN 1563
2	Obturador Wedge	Fundición Ductil GJS-500-7 <i>Ductile Iron GJS 500-7</i>	UNE-EN 1563
3	Eje Stem	X20Cr13 Acero Inoxidable 1.4021 X20Cr13 Stainless Steel 1.4021	UNE-EN 10088-1
4	Tóricas O-rings	EPDM	UNE-EN 681-1
5	Tornillos cuerpo-bonete <i>Body-bonnet screws</i>	Acero 8.8 Pavonado <i>Blue Steel 8.8</i>	
6	Tuerca Nut	Latón Brass	UNE-EN 12165

■ Dimensiones Dimensions (mm)

DN	D	A	L	L1	D1
50	165	246	328	328	160
65	185	277	370	364	200
80	200	288	403	377	200
100	220	327	456	475	245
125	250	390	530	524	245
150	285	445	604	610	245
200	340	536	721	727	300

■ Diseño Features

- Presión de trabajo PN 16 / *PN 16 operating pressure*
- DN 50-300
- Apta para aguas de consumo humano / *Suitable for water human consumption.*
- Accionamiento: volante o cuadrado / *Command: handwheel or Square cap.*
- Pintura epoxy mínimo de 200 micras de espesor / *Coating paint epoxy 200 microns as a minimum.*
- Distancia entre bridas F4, acoplamiento según UNE-EN 1092 / *Face to face F4, flange coupling according to UNE-EN 1092*

■ Ensayos Tests

- Conforme UNE-EN 1074 / *According to UNE-EN 1074*



ED.2 Rev.1