


## Familia 08102 – Achique agua sucia

Código	Denominación Artículo	Udes/Caja
081025	BOMBA ACHIQUE GD-750F 1 CV. II 220 V. C/INT.	1



### PERFORMANCE CURVES

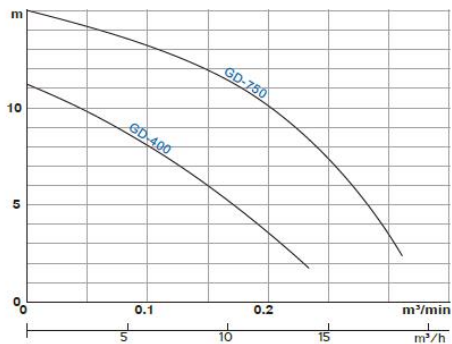


### SPECIFICATIONS

Item	Description
Limits of Use	Liquid Temp. 0~40°C(32~104°F)
Applications	Wastewater · Sewage
Type	Frequency 50Hz
	Motor 2P(3000rpm) · Dry Motor
	Insulation Class B
	Protection IP68
	Protector Auto-cut
	Bearing Ball type
M.seal Double M.seals	
Impeller Semi-open	
Material	Upper Cover ADC12
	Motor Frame ADC12
	Shaft End SUS410
	M.seal CA/CE & SIC/SIC
	Casing Synthetic Rubber
	Impeller Urethane Rubber + SPCC
	Strainer SUS304
Cable VCT or H07RN-F or SJOW	
Optional	Pumps can be customized to fit specifications

### PRODUCT NOMENCLATURE

GD	400
Type	Watt

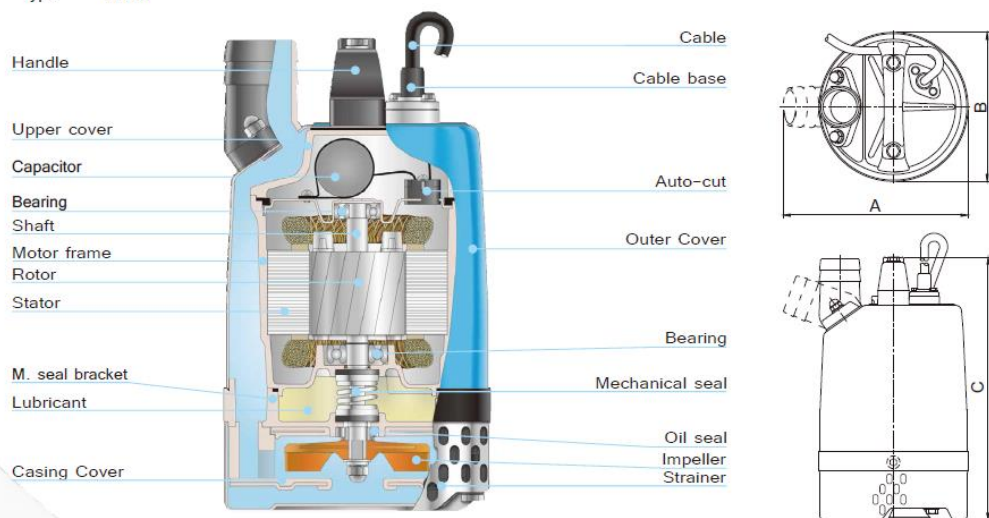

### PERFORMANCE SPEC.

Note: Weight Not Included Cable & Outlet Set.

Model	Output HP (kW)	Discharge Inch (mm)	Phase Ø	Start Method	Head m	Capacity		Solid Passage mm	Weight kg	Dimension mm		
						m³/min	m³/h			∅	A	B
GD-400	0.5 (0.4)	2" (50)	1	Capacitor	8	0.1	6	7	10.5	230	185	305
GD-750	1 (0.75)	2" (50)	1	Capacitor	11	0.16	9.6	7	12.6	230	185	327